


## HELIOS MODULE SERIES

### N-HJT HIGH EFFICIENCY MONO M6-18B-G

# 425W

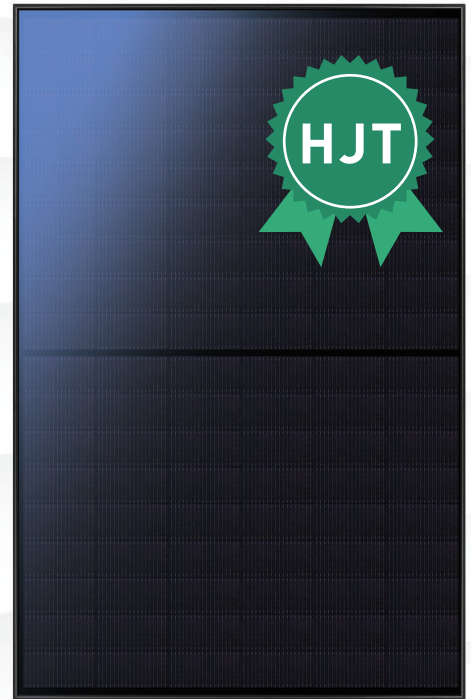

#### EXCELLENT POWER GENERATION PERFORMANCE

- ◆ Up to 85% bifaciality and up to 30% additional power generation
- ◆ Competitive high-temperature performance with ameliorated temperature coefficient (-0.24%/°C)
- ◆ Better weak illumination response of HJT technology leads higher power generation

#### MORE ENVIRONMENTALLY FRIENDLY


- ◆ Lower carbon emissions

#### CONSISTENT RELIABILITY

- ◆ Zero Light Induced Degradation
- ◆ Industry-leading cell technology of TCO thin film contributes to excellent anti-PID characteristic

#### SHORTER PAYBACK TIME

- ◆ Lower BoS cost ensure a better LCOE

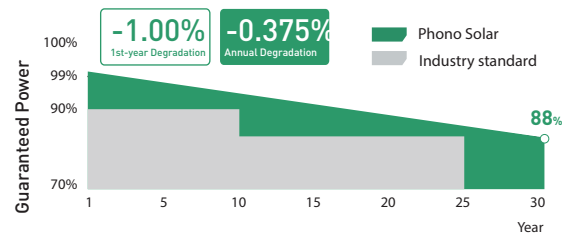

**30-year** Product Warranty | **30-year** Linear Performance Warranty

#### MANAGEMENT SYSTEM CERTIFICATES

IEC 61215, IEC 61730

ISO 9001:2015 / Quality management system

ISO 14001:2015 / Standards for environmental management system

ISO 45001:2018 / International standards for occupational health & safety



**Bloomberg** Tier1  
NEW ENERGY FINANCE



## ELECTRICAL TYPICAL VALUES

Model	PS425M8GFH-18/VSH	
Testing Condition	STC	NOCT
Rated Power (Pmpp)	425	323
Rated Current (Impp)	12.79	10.31
Rated Voltage (Vmpp)	33.23	31.35
Short Circuit Current (Isc)	13.24	10.67
Open Circuit Voltage (Voc)	39.56	37.76
Module Efficiency [%]	21.76	

STC(Standard Testing Conditions):Irradiance 1000W/m<sup>2</sup>, AM 1.5, Cell Temperature 25°C

NOCT (Nominal Operation Cell Temperature): Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C , Spectra at AM1.5, Wind at 1m/S

## BSTC\*\*

Maximum Power (Pmax)	470
Optimum Operating Current (Impp)	14.14
Optimum Operating Voltage (Vmpp)	33.23
Short Circuit Current (Isc)	14.64
Open Circuit Voltage (Voc)	39.56

\*\*BSTC:Front side irradiation 1000W/m<sup>2</sup>, back side reflection irradiation 135W/m<sup>2</sup> , AM 1.5, ambient temperature 25°C

## MECHANICAL CHARACTERISTICS

Cell Type	Monocrystalline 182mm x 91mm
Dimension (L x W x H)	Length:1722mm (67.80 inch) Width: 1134mm (44.65 inch) Height: 30mm (1.18 inch)
Weight	22.0kg (48.50 lbs)
Glass	1.6mm/1.6mm toughened glass
Frame	Anodized Aluminium Alloy
Cable (Including Connector)	4mm <sup>2</sup> (IEC), (+):450mm,(-):250mm or Customized Length
Junction Box	IP 68 Rated

## TEMPERATURE RATINGS

Voltage Temperature Coefficient	-0.24%/°C
Current Temperature Coefficient	+0.04%/°C
Power Temperature Coefficient	-0.26%/°C
Tolerance	0~+5w
NOCT	44±2°C
Bifaciality	80±5%




## ABSOLUTE MAXIMUM RATING

Operating Temperature	From -40 to +85°C
Hail Diameter @ 80km/h	Up to 25mm
Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Maximum Series Fuse Rating	25A
PV Module Classification	Class II
Maximum System Voltage	DC 1500V

## PACKING CONFIGURATION

Container	40' HQ
Pieces/Container	936

## ELECTRICAL CHARACTERISTICS

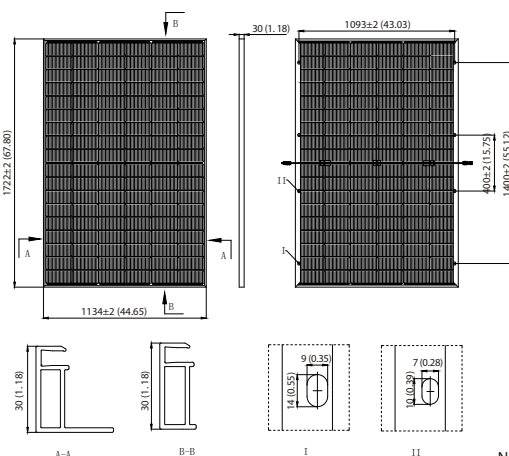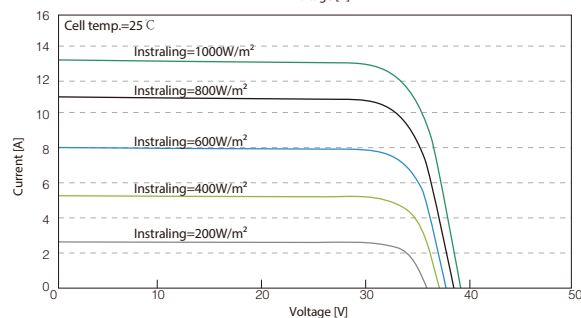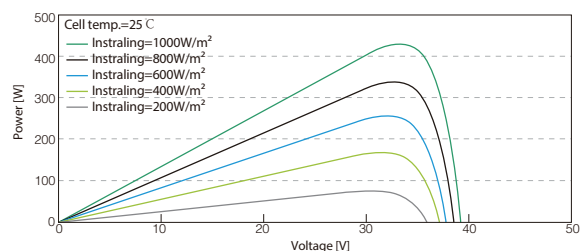

Note:mm (inch)